


DC 160-310

DCT 410-1000

DCT 410-1000/P



Centrifugal drainage high head pumps ideal for civil and industrial applications, specifically designed for very heavy use. Available in the mobile or permanent versions with coupling feet.



Grey water

Construction features

Painting cataphoresis

Pump body cast iron



Impeller cast iron

Mechanical seal

double seal with oil barrier:
silicon carbide on pump
side, ceramic-graphite on
motor side

Motor shaft stainless steel AISI 304

Free passage Ø max 10 mm

Max submergence 20 m

Liquid temperature 0 - 40 °C

Cable H07 RN8F, 10 m

Bolts A2 stainless steel

Foot support galvanized iron

Gaskets NBR rubber

Motor

3~ 230V - 50Hz

3~ 400V - 50Hz

3~ 230/400V - 50Hz

3~ 400/690V - 50Hz

2 poles induction motor

1~ 230V - 50Hz

required run capacitor
(35µF for 1,5HP model,
50µF for 2HP model)

Insulation class F

Protection degree IPX8

DC T 560 -CF counter-flange ☐ not included
CF included

..... motor ☐ 1~ **T** 3~



..... pump type



TYPE	LOTS			
	TRUCK		CONTAINER	
	PALLET (cm)	N° pumps	PALLET (cm)	N° pumps
DC 160÷310	85×110×145	18	85×110×190	27
DCT 410-560	85×110×170	12	85×110×170	12
DCT 750-1000	100×120×190	12	100×120×190	12



DC

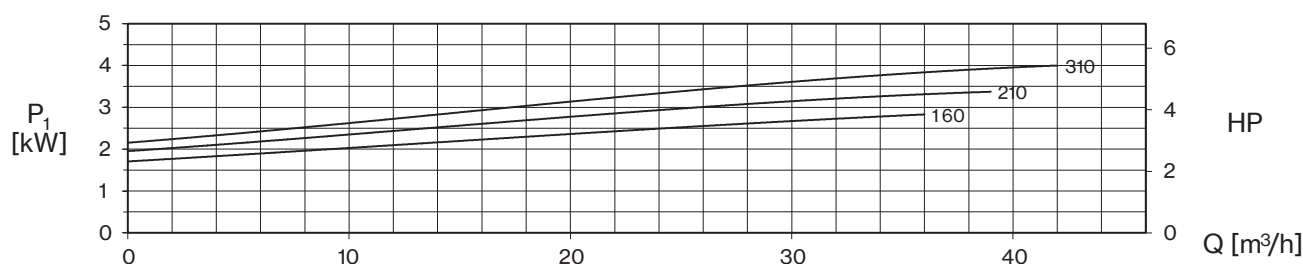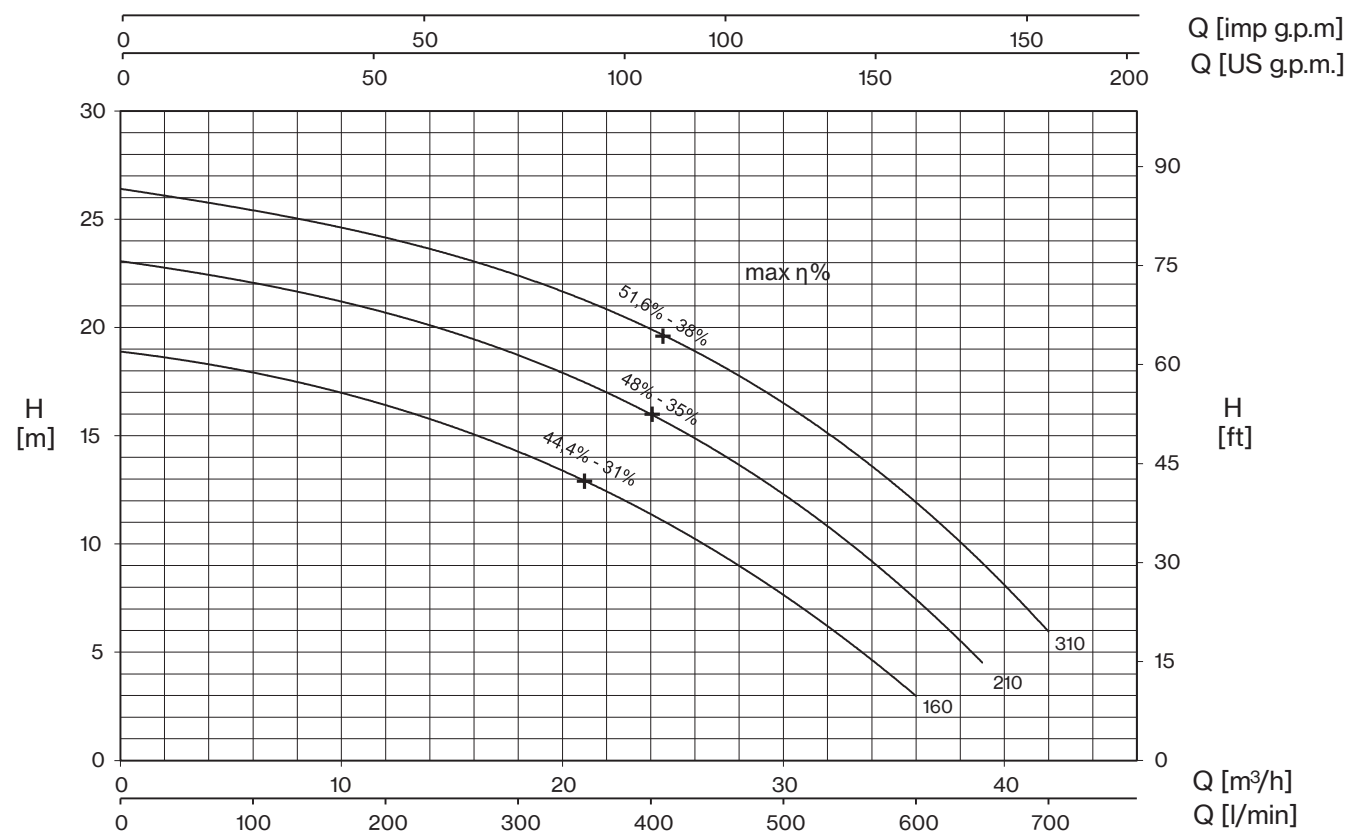

TYPE - 50 Hz		CURRENT				
1~	3~	1- 230 V	3- 230V (*)	3- 400V	230/400 V λ / Δ (*)	400/690 V λ / Δ
DC 160	DCT 160	13,8	8,3	4,8	-	-
DC 210	DCT 210	16,5	10,2	5,9	-	-
-	DCT 310	-	12	6,9	-	-


+ max η %

max hydraulic efficiency and respective total efficiency

(*) no standard execution

TYPE - 50 Hz		P2		P1		Q (m³/h - l/min)								
1~	3~			1~	3~	0	6	12	18	24	30	36	39	42
						0	100	200	300	400	500	600	650	700
				HP	kW	kW		H (m)						
DC 160	DCT 160	1,5	1,1	3,0	2,8	18,9	17,9	16,4	14,3	11,4	7,6	3,0		
DC 210	DCT 210	2	1,5	3,7	3,4	23,0	22,2	20,7	18,6	15,9	12,5	7,4	4,5	
-	DCT 310	3	2,2	-	4,0	26,4	25,4	24,2	22,4	19,9	16,4	12,1	9,1	5,9



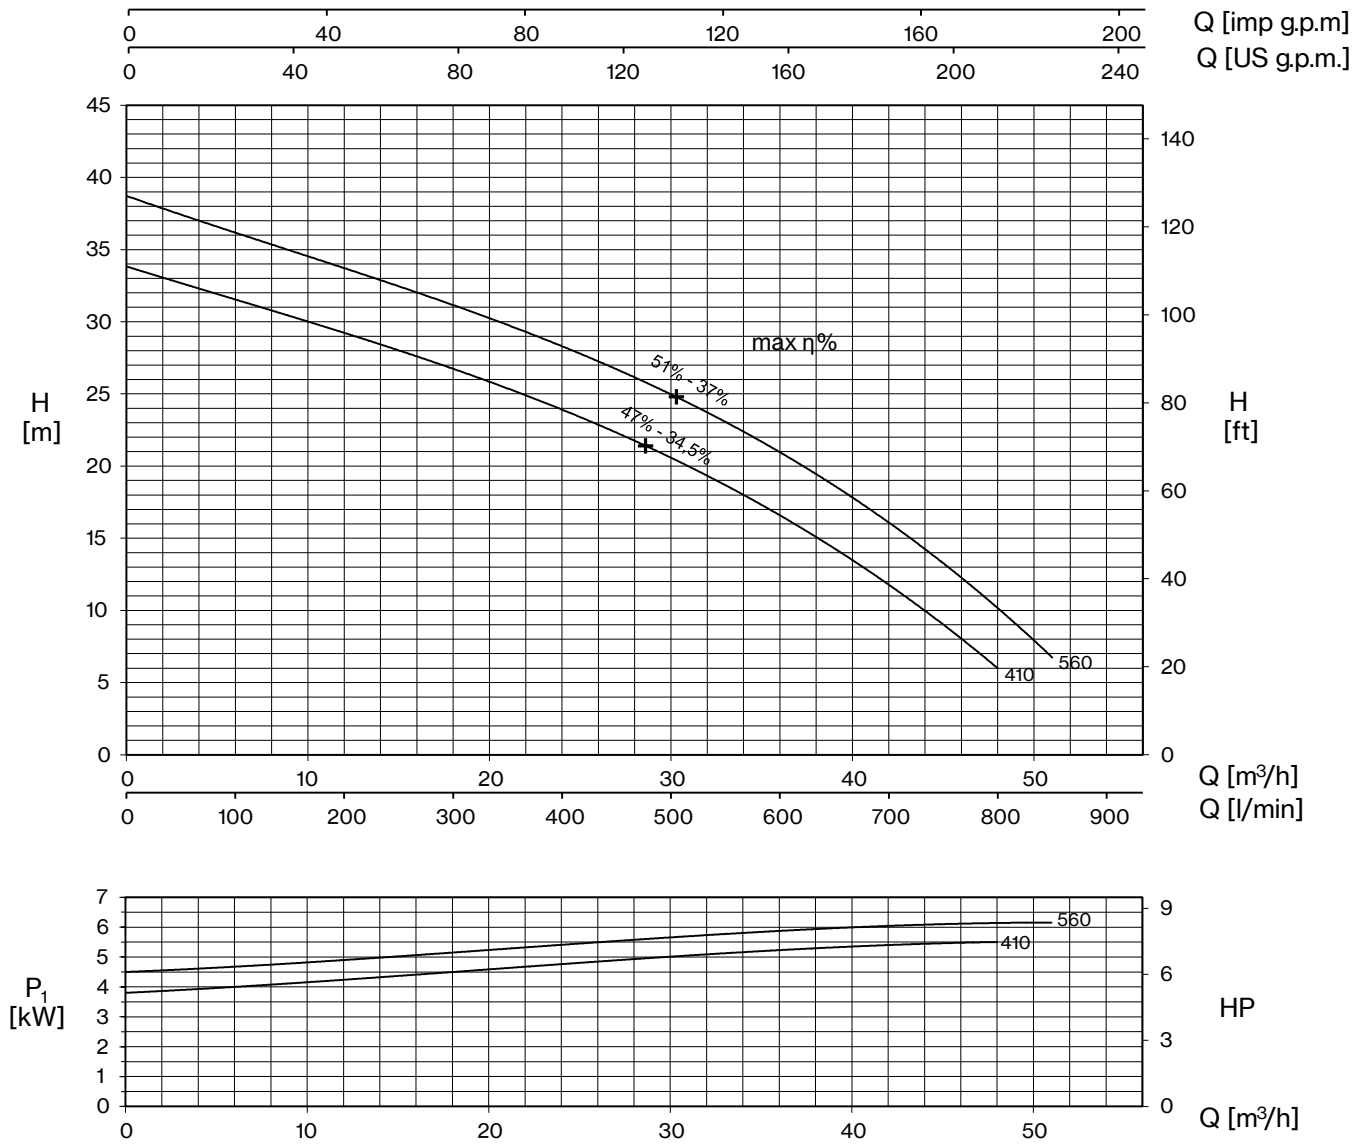

TYPE - 50 Hz	CURRENT			
3~	3~ 230V (*)	3~ 400V	230/400 V Δ / Δ (*)	400/690 V Δ / Δ
DCT 410	15,4	8,9	-	-
DCT 560	17,6	10,2	-	-


+ max η %

max hydraulic efficiency and respective total efficiency

(*) no standard execution

TYPE - 50 Hz	P2		P1	Q (m³/h - l/min)									
				0	6	12	18	24	30	36	42	48	51
	HP	kW	kW	0	100	200	300	400	500	600	700	800	850
DCT 410	4	3	5,5	33,8	31,6	29,2	26,8	23,9	20,5	16,5	12,0	5,9	
DCT 560	5,5	4	6,3	38,7	36,1	33,9	31,2	28,3	24,7	20,9	16,3	10,4	6,5

DC

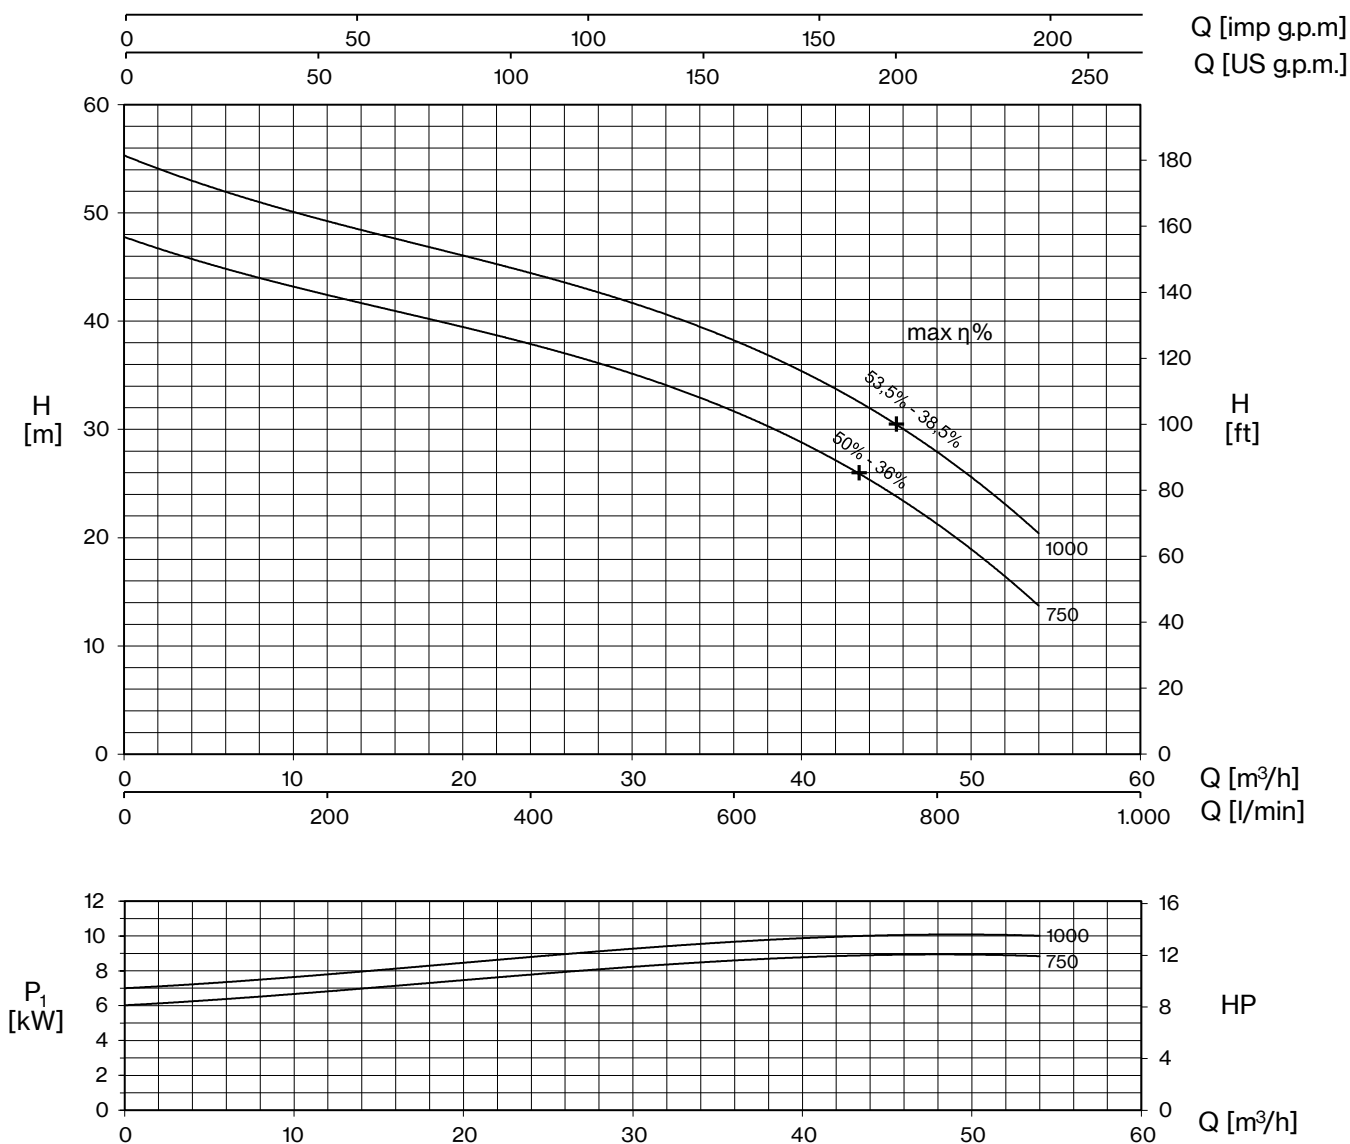

TYPE - 50 Hz	CURRENT			
3~	3~ 230V (*)	3~ 400V	230/400 V Δ / Δ (*)	400/690 V Δ / Δ
DCT 750	-	15,3	26,5	15,3
DCT 1000	-	17,5	30,3	17,5


+ max η %

max hydraulic efficiency and respective total efficiency

(*) no standard execution

TYPE - 50 Hz	P2		P1	Q (m^3/h - l/min)							
				0	12	18	24	30	36	42	48
	HP	kW	kW	0	200	300	400	500	600	700	800
DCT 750	7,5	5,5	9,0	47,6	42,9	40,4	37,7	34,7	31,2	27,4	22,3
DCT 1000	10	7,5	10,3	55,1	49,8	47,1	44,2	41,1	37,8	34,0	29,1




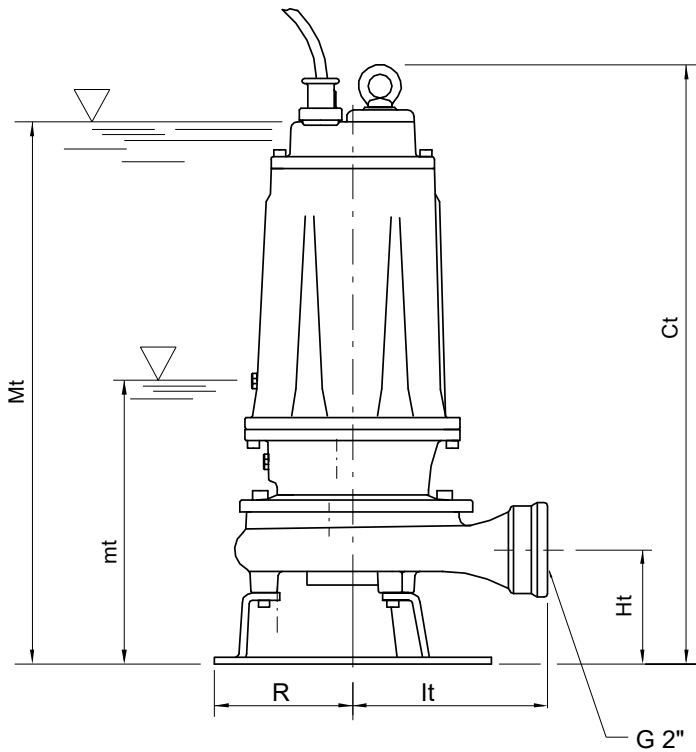


mt: minimum working level
Mt: minimum submersion level for continuous duty

TYPE		DIMENSIONS (mm)							Kg
1~	3~	Ct	Ht	R	lt	mt	Mt	DNM	
DC 160	DCT 160	513	102	117	174	205	475	2"G	37
DC 210	DCT 210	513	102	117	174	205	475	2"G	37,5
-	DCT 310	513	102	117	174	205	475	2"G	37

TYPE	PROTECTION		1 PUMP CONTROL PANEL			2 PUMPS CONTROL PANEL		
	1~ 230V	3~ 400V	1~ 230V	3~ 400V	400/690 V	1~ 230V	3~ 400V	400/690 V
DC 160	PMC 15/35-15	PT 20-30-40/4.3-6.8	EQSM + 35μF	EQSMT 10		EQ2SM + 2×35μF	EQ2SMT 10	
DC 210	PMC 20/50-18	PT 20-30-40/4.3-6.8	EQSM + 50μF	EQSMT 10		EQ2SM + 2×50μF	EQ2SMT 10	
DCT 310		PT 40-50/5.7-9.1		EQSMT 10			EQ2SMT 10	
DCT 410		PT 55-75/8.6-13.5		EQSMT 10			EQ2SMT 10	
DCT 560		PT 55-75/8.6-13.5		EQSMT 10			EQ2SMT 10	
DCT 750		PT 100/12.5-16.5		EQSMT 10	QST 7		EQ2SMT 10	Q2ST 7
DCT 1000		PT 125-150/16-21		EQSMT 10	QST 10		EQ2SMT 15	Q2ST 10

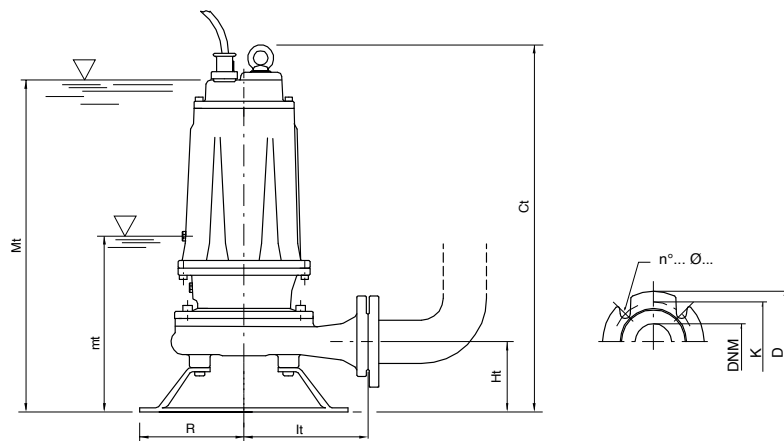

ACCESSORIES

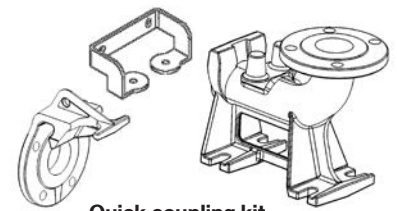

Quick coupling kit





Counterflange

mt: minimum working level

Mt: minimum submencege level for continuos duty

TYPE	DIMENSIONS (mm)							
3~	Ct	Ht	R	lt	mt	Mt	DNM	
DCT 410	595	112	160	187	263	550	50	60,5
DCT 560	595	112	160	187	263	550	50	63,5
DCT 750	680	160	180	250	280	630	65	91
DCT 1000	680	160	180	250	280	630	65	93,5

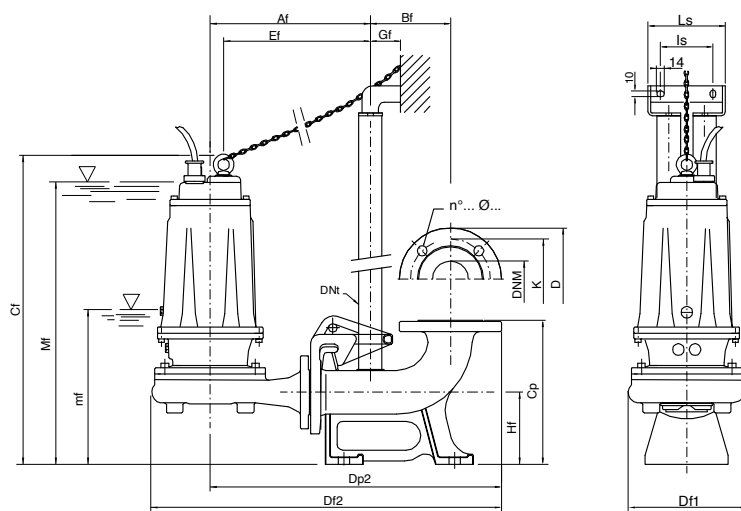

mf: minimum working level

Mf: minimum submence level for
continuos duty

TYPE	DIMENSIONS (mm)																	
3-	Af	Bf	Cf	Cp	Df1	Df2	Dp2	DNt	Ef	Gf	Hf	I1	I2	Is	Ls	mf	Mf	DNM
DCT 410/P	300	145	614	260	237	654	535	1" ¼	269	55	130	200	100	95	140	290	566	50
DCT 560/P	300	145	614	260	237	654	535	1" ¼	269	55	130	200	100	95	140	290	566	50
DCT 750/P	331	145	656	260	279	701	569	1" ¾	296	55	130	200	100	95	140	290	600	65
DCT 1000/P	331	145	656	260	279	701	569	1" ¾	296	55	130	200	100	95	140	290	600	65

Flange UNI PN 10 (mm)			
DNM	K	D	n°... Ø...
50	125	165	4... 18...
65	145	185	4... 18...