




Two impeller compact centrifugal pumps for constructing pressurisation systems for civil and industrial plant: guarantee good ratio between pressure and flow rate.


Construction features	
Pump body	cast iron
Motor bracket	cast iron
Impeller	Noryl® or brass
Mechanical seal	ceramic-graphite-NBR
Motor shaft	stainless steel AISI 303
Liquid temperature	0 - 50 °C
Operating pressure	max 8 bar

Motor	
	3~ 230/400V - 50Hz
2 poles induction motor	1~ 230V - 50Hz (with thermal protection)
Insulation class	F
Protection degree	IPX4

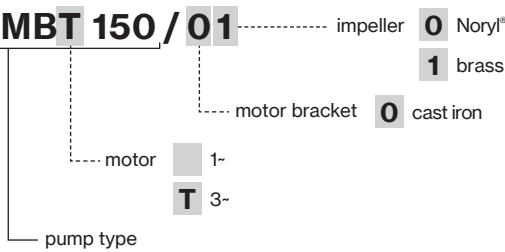


TYPE	LOTS			
	TRUCK		CONTAINER	
	PALLET (cm)	N° pumps	PALLET (cm)	N° pumps
MB	85×110×130	40	85×110×190	60



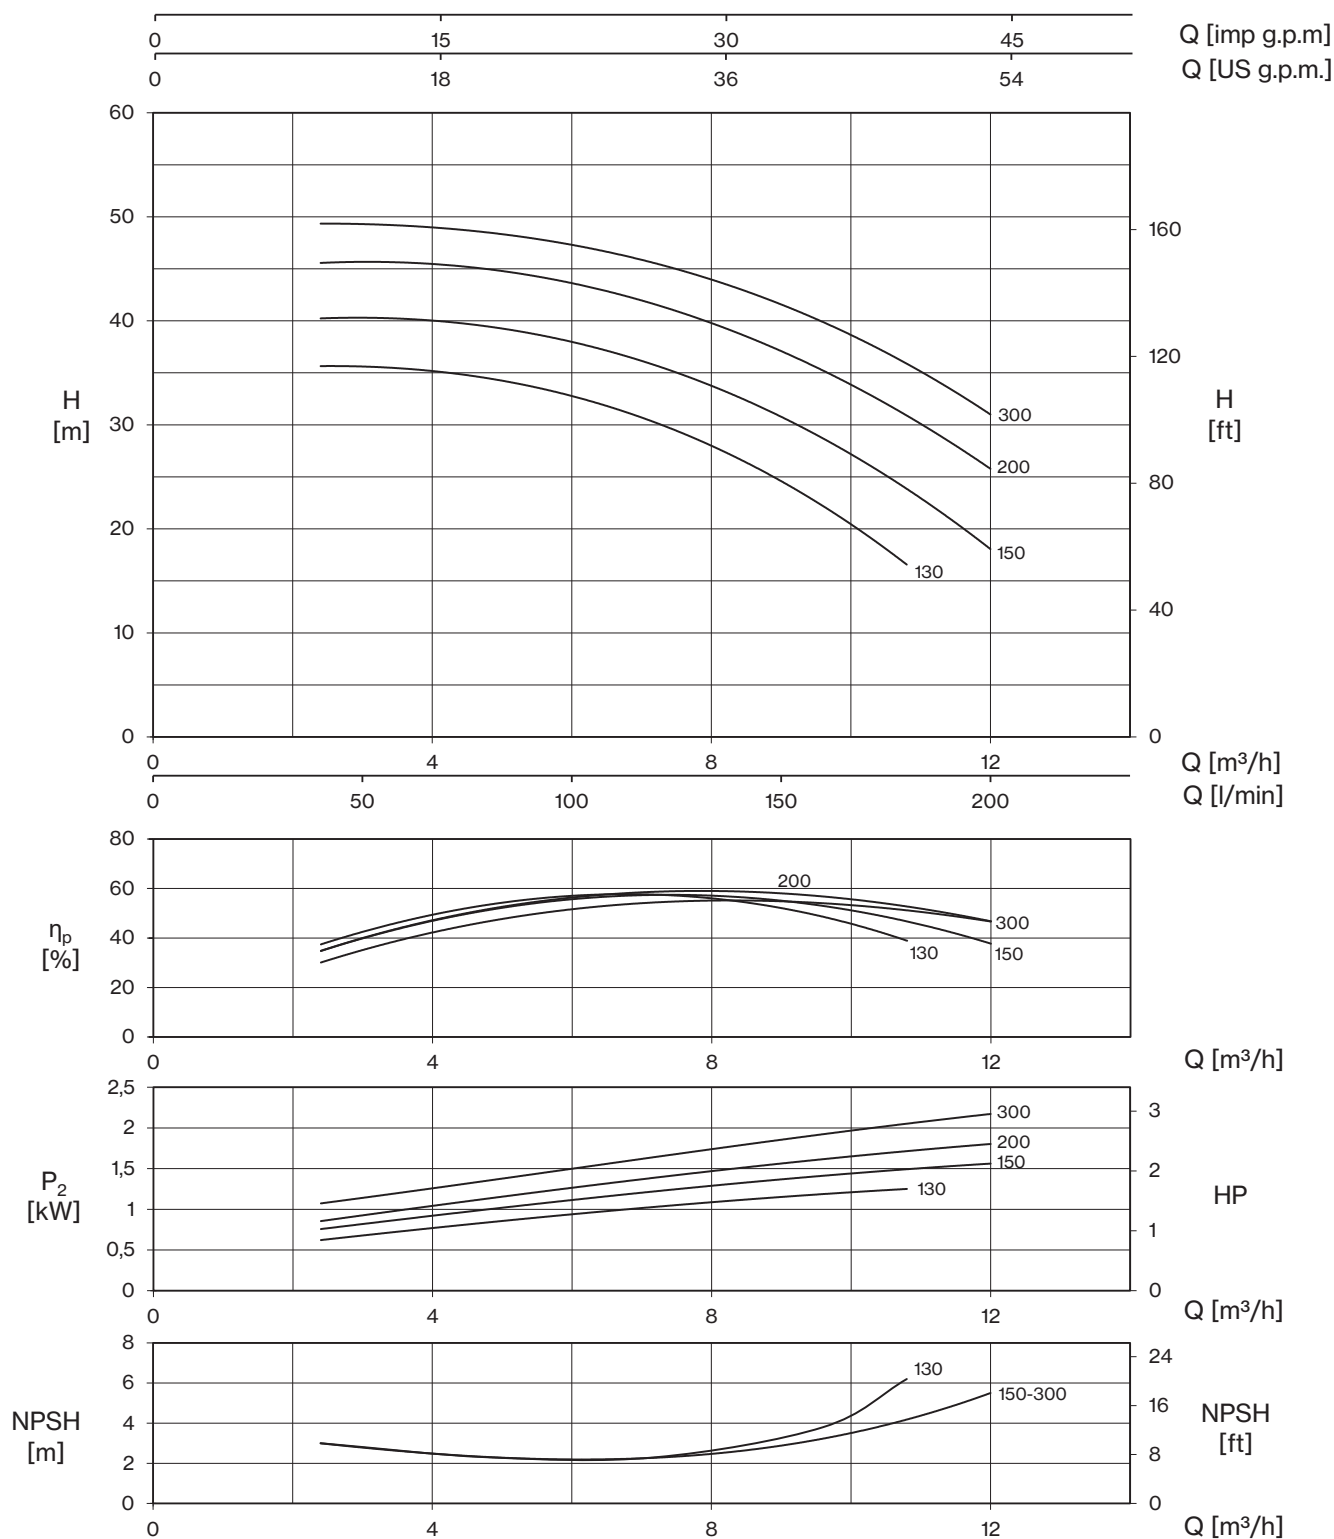

TYPE - 50 Hz		P2		P1		CURRENT		Q (m³/h - l/min)						
1~	3~			1~	3~	1~ 230V	3~ 400V	0	2,4	4,8	7,2	9,6	10,8	12
								0	40	80	120	160	180	200
				HP	kW	kW		A		H (m)				
MB 130	-	1,8	1,3	1,6	-	7,4	-	35,1	35,6	34,5	30,2	22,2	16,6	
MB 150	MBT 150	2	1,5	2,0	1,9	8,9	3,7	39,2	40,2	39,5	35,7	28,7	23,9	18,0
MB 200	MBT 200	2,5	1,85	2,3	2,2	10,4	4,4	44,9	45,6	44,8	41,7	35,2	30,8	25,8
MB 300	MBT 300	3	2,2	2,6	2,5	12,4	5,1	49,5	49,4	48,3	45,8	39,8	35,8	31,1



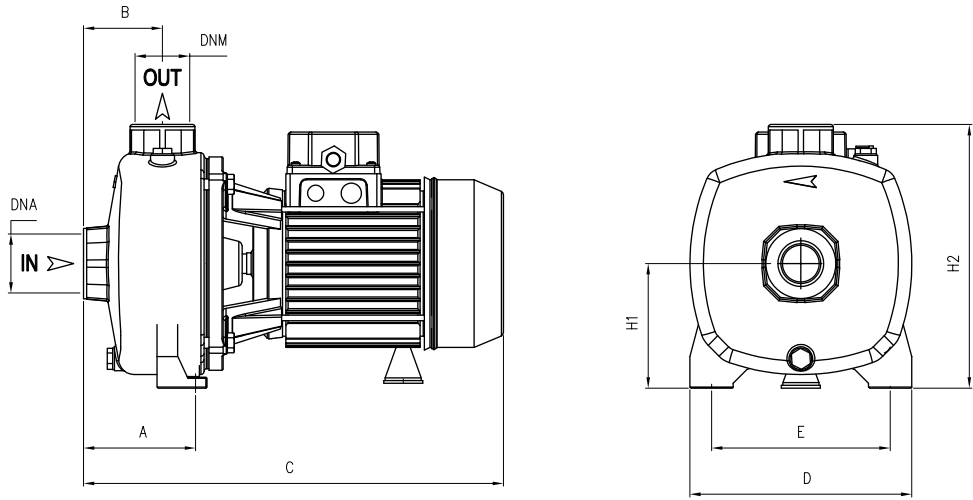

TYPE		DIMENSIONS (mm)												 Kg	
~1	~3	A	B	C	D	E	H1	H2	DNA	DNM	I	L	M	~1	~3
MB 130	-	108	73	415	205	165	115	242	1" ½ G	1" ¼ G	433	220	287	23,5	-
MB 150	MBT 150	108	73	415	205	165	115	242			433	220	287	24	25
MB 200	MBT 200	108	73	415	205	165	115	242			433	220	287	25,5	25
MB 300	-	108	73	485	205	165	115	242			520	235	320	34	-
-	MBT 300	108	73	415	205	165	115	242			433	220	287	-	26,5