



PRODUCT INFO

DESIGNATION

helijardim am | gil

PRODUCT CODE

helijardim am | 110 200


helijardim gil | 110 212

MATERIALS

Flexible PVC with polyester yarn.

STANDARDS

Heliflex internal requirements.

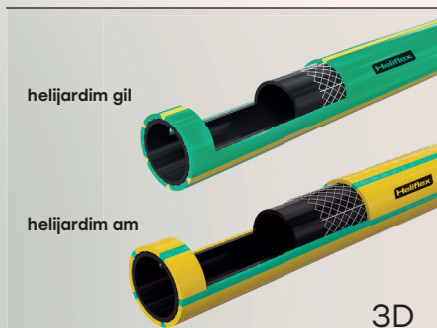

TECHNICAL FEATURES

UV resistant; Flexible;
Resistant to average
pressures; Phtalate-free.



build to last

Description

Three-layer flexible PVC hose reinforced with high-quality braided textile, anti-kink. The secure choice for various applications. On its cover, high-quality PVC ensures high resistance to UV attacks, while the recycled PVC in its interior ensures excellent flexibility and crush resistance. This combination achieves a reduction in its ecological footprint.

Application Areas:

Mainly in the garden, a range of uses in the house and conveying water in general.

Main features:

Light hose for medium pressure with an opaque external layer that confers UVs protection.

Temperature: -15/+55°C

Presentation:

Colour: Yellow with green stripes (helijardim am) or green with yellow stripes (helijardim gil).

Available in lengths of 15, 25 and 50 meters.*

Note: Other colours, diameters and lengths available upon request.

Marking:

Heliflex helijardim gil Ømm lote data

Heliflex helijardim am Ømm lote data



helijardim am | 110 200 helijardim gil | 110 212

CODE				OUTER Ø	EQUIVALENCE	THICKNESS	WEIGHT	WORKING PRESSURE	BURST PRESSURE
GROUP	INNER Ø	LENGTH	COLOR						
	mm	m		mm	(pol. - inches)	mm	kg/m	bar	bar
am 110 20 gil 110 212	012	*	43/15	17,6	1/2"	2,3	0,150	10,0	25,0
	015	*		20,0	5/8"	2,5	0,180	10,0	25,0
	019	*		25,0	3/4"	3,0	0,260	10,0	25,0
	025	*		31,8	1"	3,4	0,380	10,0	25,0
	032	*		40,0	1 1/4"	4,0	0,600	8,0	20,0

kit helijardim gil | 111 292

CODE				OUTER Ø	EQUIVALENCE	THICKNESS	WEIGHT	WORKING PRESSURE	BURST PRESSURE
GROUP	INNER Ø	LENGTH	COLOR						
	mm	m		mm	(pol. - inches)	mm	kg/m	bar	bar
111 292	015	*	15	20,0	5/8"	2,5	0,180	10,0	25,0
	019	*		25,0	3/4"	3,0	0,260	10,0	25,0

