




PRODUCT INFO

DESIGNATION
heliflex sl

PRODUCT CODE
230 011

MATERIALS
Flexible PVC reinforced with
rigid PVC spiral.

STANDARDS
Heliflex internal requirements.

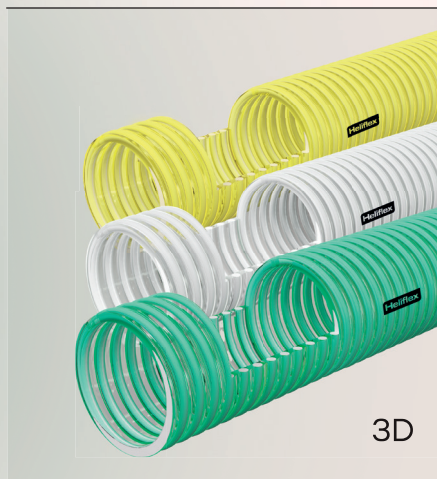

traditions that bring generations together

Description

Flexible hose reinforced with a rigid PVC spiral, lightweight, with high flexibility and resistance to abrasion. Transparent wall and smooth interior. Manufactured according to ISO3994 standards.

Application Areas:

Light water suction in lakes and wells, with moto-pumps and electro pumps. Domestic use; Water conveyance; Agricultural use.

Main features:

Flexible hose reinforced with rigid spiral, light, with great flexibility and good abrasion resistance.

Temperature:

-5/+55°C

Presentation:

Colour: Green, transparent and yellow.

Other colours, diameters and lengths available upon request.*

Marking:

Heliflex | heliflex sl Ømm lote data

TECHNICAL FEATURES

Light-weight; Fittings assembled; Easy to transport.



heliflex sl | 230 011

CODE				OUTER Ø	THICKNESS	WEIGHT	WORKING PRESSURE	BURST PRESSURE	VACUUM	BEND RADIUS
GROUP	INNER Ø	LENGTH	COLOR							
	mm	m								
230 011	020	*	11/31/41	23,8	1,9	0,230	7,0	17,0	0,6	125
	022	*		25,8						125
	025	*		29,0						2,0
	030	*		34,4	2,2	0,280	5,0	12,5		160
	032	*		36,6	2,3	0,290				160
	035	*		40,4	2,7	0,380				160
	038	*		44,6	3,3	0,480				200
	040	*		46,2	3,1	0,470				210
	042	*		48,2		0,540				210
	045	*		52,0	3,4	0,640				225
	050	*		56,8		0,680				250
	053	*		60,4		0,750				265
	060	*		67,4	3,7	0,850				300
	063	*		70,4		1,160	4,0	10,0		315
	075	*		83,0	4,0					375
	090	*		98,8	4,4	1,430	3,0	7,5		450
	100	*		109,2	4,6	1,850				500
	110	*		120,0	5,0	1,925				550
	127	*		137,8	5,4	2,500				650
		152		*		164,4	6,2	3,250		2,5



Cor 11



Cor 31



Cor 41